


## 410022 ANTIVIBRANTE MF

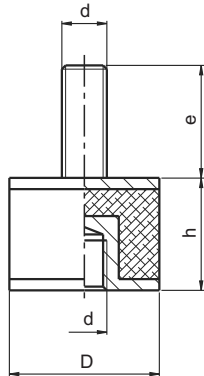

Goma compuesta NR 60°±5° shore A.  
Espiga en acero cincado.  
Otras medidas bajo pedido, consúltenos.  
Cp: Carga máxima a compresión (Kg).  
Cz: Carga máxima a cizallamiento (Kg).

Código	D	h	d	e	Cp	Cz
41002201515	15	15	M4	14	15	3
41002202015	20	15	M6	16	34	3
41002202020	20	20	M6	16	29	2
41002202520	25	20	M6	18	45	5
41002202530	25	30	M6	18	35	3
41002203020	30	20	M8	23	66	9
41002203030	30	30	M8	23	61	7
41002203040	30	40	M8	23	54	5
41002204030	40	30	M8	23	98	15
41002204035	40	35	M8	23	88	13
41002205020	50	20	M10	28	169	21
41002205030	50	30	M10	28	159	20
41002205040	50	40	M10	28	144	18
41002205050	50	50	M10	28	134	14
41002206550	65	50	M12	37	230	23
41002207525	75	25	M12	37	382	89
41002207540	75	40	M12	37	378	78
41002207550	75	50	M12	37	373	68
41002210050	100	50	M16	45	660	98
41002210055	100	55	M16	45	636	78
41002210060	100	60	M16	45	586	48