


410021 ANTIVIBRANTE M

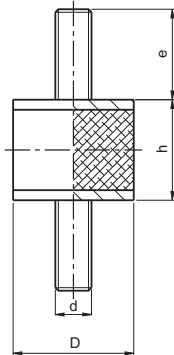

Goma compuesta NR 60°±5° shore A.
Espiga en acero cincado.
Otras medidas bajo pedido, consúltenos.
Cp: Carga máxima a compresión (Kg).
Cz: Carga máxima a cizallamiento (Kg).

Código	D	h	d	e	Cp	Cz
41002101310	13	10	M5	10	15	2
41002101515	15	15	M4	14	15	2
41002102010	20	10	M6	16	36	3
41002102015	20	15	M6	16	34	4
41002102020	20	20	M6	16	34	2
41002102515	25	15	M6	18	35	5
41002102520	25	20	M6	18	45	5
41002102530	25	30	M6	18	34	3
41002103020	30	20	M8	23	66	9
41002103030	30	30	M8	23	61	7
41002103040	30	40	M8	23	55	5
41002104030	40	30	M8	23	98	15
41002104035	40	35	M8	23	88	13
41002105020	50	20	M10	28	168	21
41002105030	50	30	M10	28	158	19
41002105040	50	40	M10	28	143	17
41002105050	50	50	M10	28	133	13
41002196030	60	30	M12	37	172	36
41002106550	65	50	M12	37	230	23
41002107525	75	25	M12	37	382	89
41002107540	75	40	M12	37	377	79
41002107550	75	50	M12	37	372	69
41002110050	100	50	M16	42	560	99
41002110055	100	55	M16	42	635	79
41002110060	100	60	M16	42	587	49